



# GY-HGHS120K

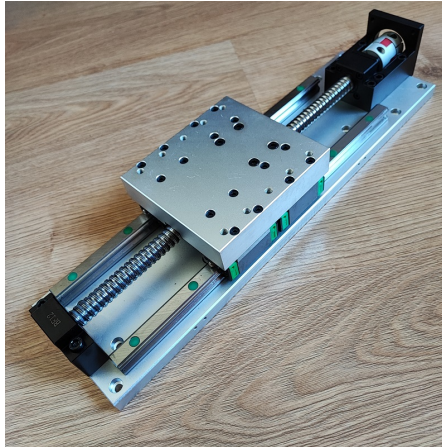

GY-HGHS120K Primary Configuration/Parameters

Adaptation Motor	57/86 stepping motor, 100W/200W/400W Servo				
Linear Guideway	HGR15*2 HGH15*4				
Ball Screw	Φ 16-C7				
Repeatable Positioning Accuracy ( mm )	± 0.03				
Lead Screw ( mm )	5	10	16	20	
Max Speed ( mm/s )	250	500	800	1000	
Maximum Handling Weight ( Kg )	Horizontal	100	70	50	30
	Vertical	30	25	20	15
Stroke Range ( mm )	100-1000				

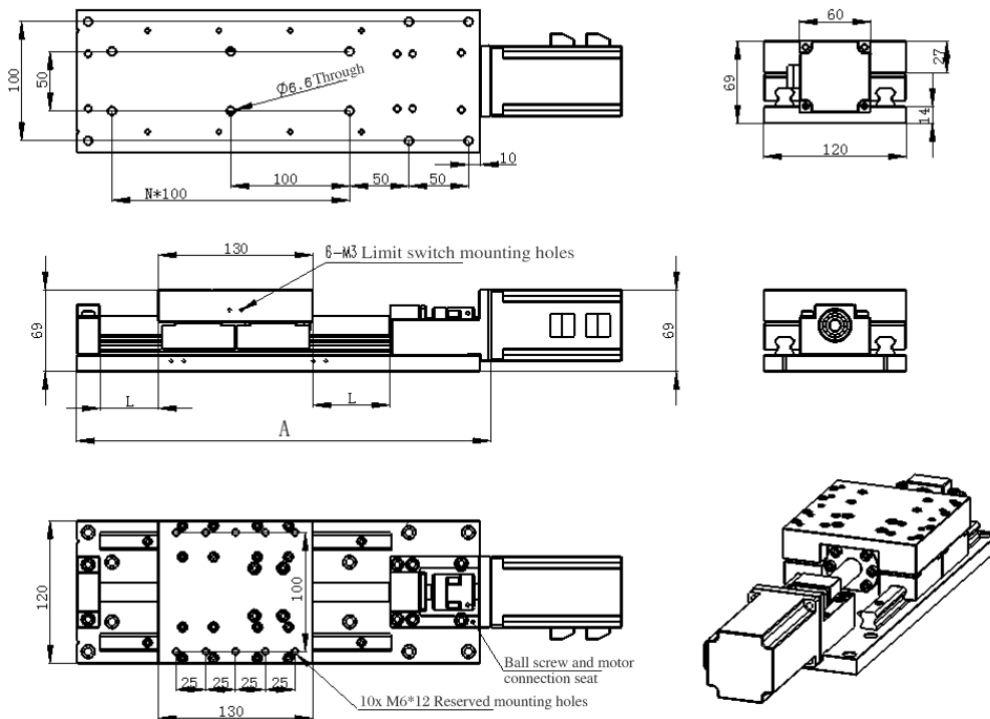

Effective stroke ( mm )	100	200	300	400	500	600	700	800	900	1000	1100	1200
A ( mm )	350	450	550	650	750	850	950	1050	1150	1250	1350	1450
Weight ( Kg )												